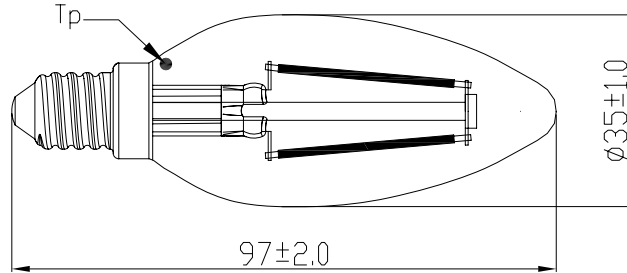


DIMENSIONS (mm):

Bulb type : Candle

Finish : Clear

Cap type : E14 Nickel Plated Brass

Light Colour : 827 Homelight

ELECTRICAL DATA:

		RATED	MIN.	MAX.
Lamp Wattage	(W) :	2.5	-	2.8
Lamp Voltage	(V) :	235	230.0	240.0
Lamp Current	(mA) :	20		
Power Factor	(λ) :	0.5	0.4	-
Supply Frequency	(Hz) :	50		
Energy Consumption per 1000h	(kW/h) :	2.5		

PHOTOMETRIC DATA:

Luminous Flux	(lm) :	250	225	-
Luminous Efficacy	(lm/W) :	100		
Correlated Colour Temperature	(K) :	2700		
Colour Rendering Index	(Ra) :	80	77	-
Red Colour Rendition	(R9) :	10		
Chromaticity Co-ordinates	(x,y) :	CCx=0.460	CCy=0.411	6-step MacAdam Ellipse

OPERATING CONDITIONS:

Ta Ambient temperature range	(°C) :	25	-10	45
Tp Point	(°C) :	60	-	-
Starting Time	(s) :	-	-	0.5
Warm-up Time to >95% Flux	(s) :	-	-	1.0
Burning Position	:	General		
External Control Gear type	:	None		

LAMP LIFE:

Average Life (L _{70F50})	(h) :	6,000
Switching Cycles	(#) :	5,000

APPLICATION: General lighting.

Not suitable for use with dimmer switches / electronic timers / electronic switches.


Complies with IEC62560, IEC62612, IEC62471, IEC61547, IEC61000, EN55015, EN62493.

Issued by : GUANGZHOU
Date : 5.VIII.2014
Revision date :


DATA SHEET

Spec No. : AEC_L-LED-A-0027180
Supers
Page 1 of 2

PHOTOMETRIC GRAPHICS:

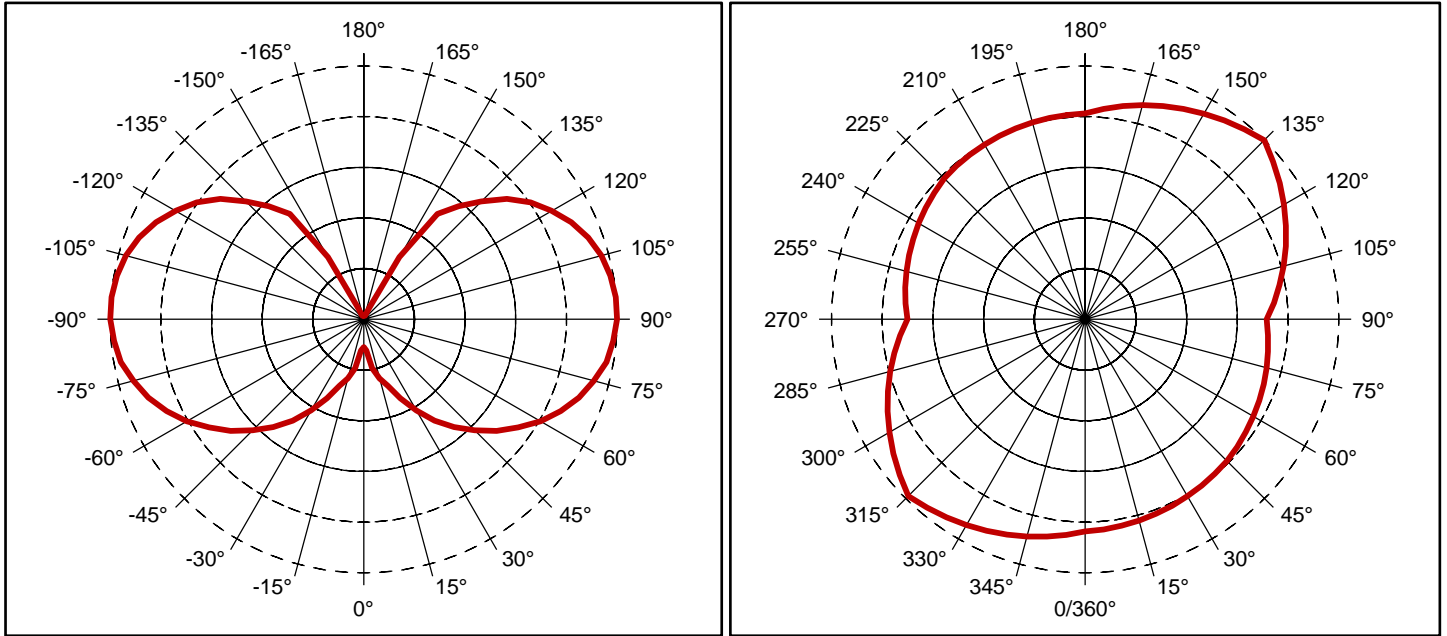

SPECTRAL GRAPHICS:

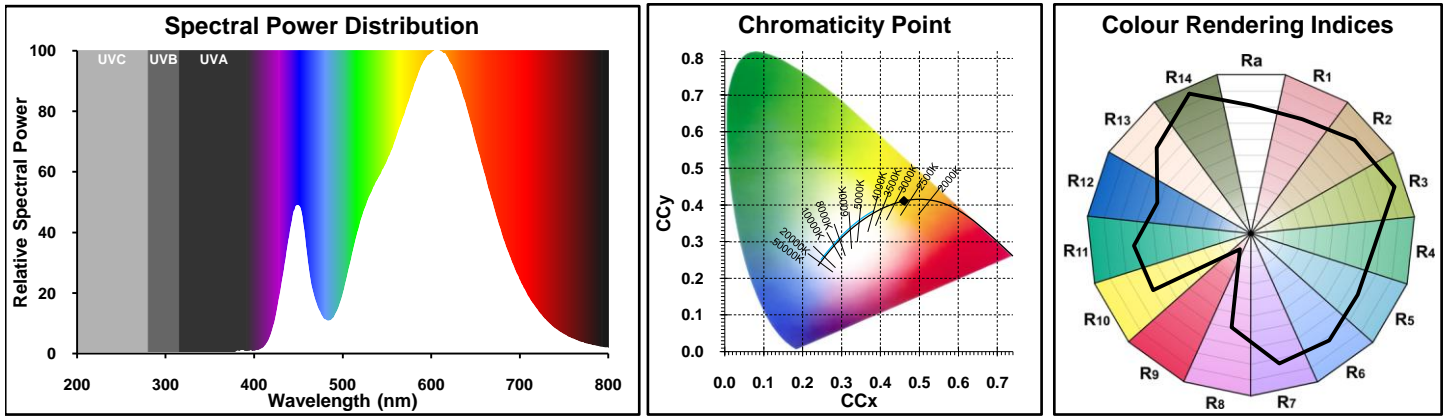

PERFORMANCE GRAPHICS:

Issued by : GUANGZHOU Date : 5.VIII.2014 Revision date :	<h1>DATA SHEET</h1>	Spec No. : AEC_L-LED-A-0027180 Supers Page 2 of 2
--	---------------------	---