


PHILIPS

LuxSpace Accent Compact Elbow

RS742B

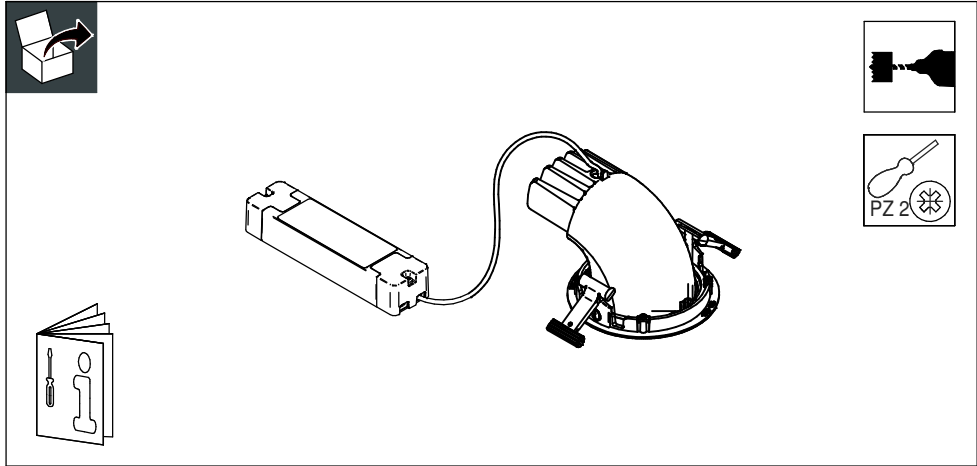

220 V
240 V

50 Hz
60 Hz






GLOW WIRE
650 °C

IK02

IP20











Model	Lumen package	Color Temperature [K]	kg
LED17S		827/830/840/PW930/CRW/CH	1,1
LED19S		FMT/ROSE	1,1
LED20S		827/830/840/PW930	1,1
RS742B			
LED27S		827/830/840/CH/PW930/PC930/FMT/ROSE/FR/CRW	1,1
LED39S		827/830/840/930/CH/FR/PW930	1,1
LED49S		827/830/840/930/PW930	1,1

Product info

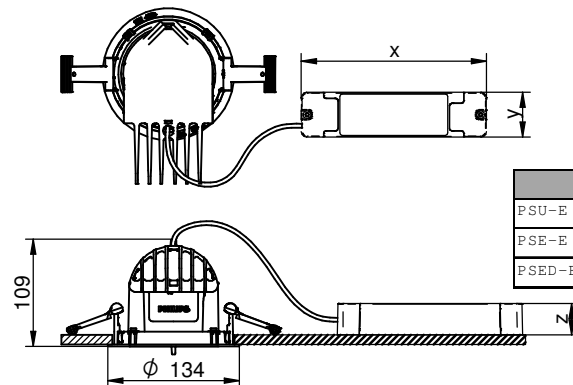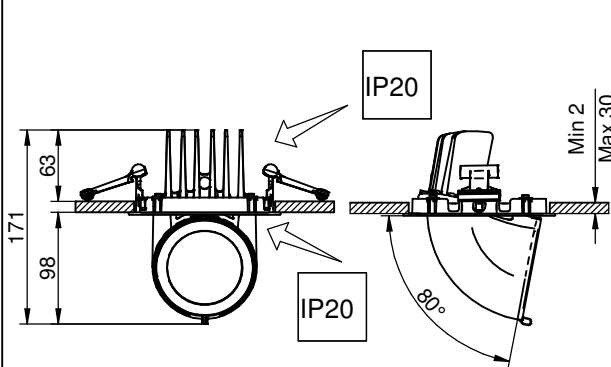

	x	y	z
PSU-E	157	47	30
PSE-E	190	46	32
PSED-E	200	74	32

Minimum built-in dimensions

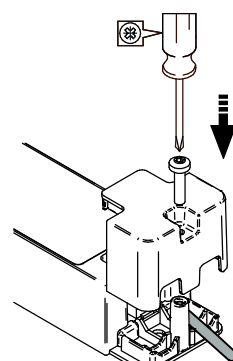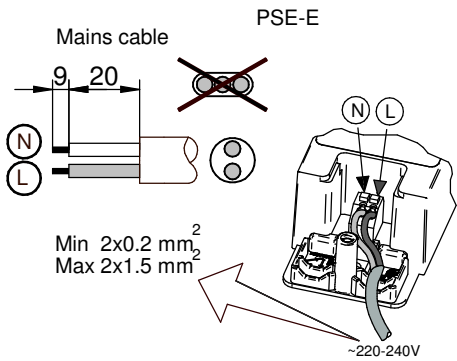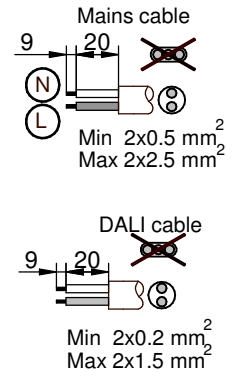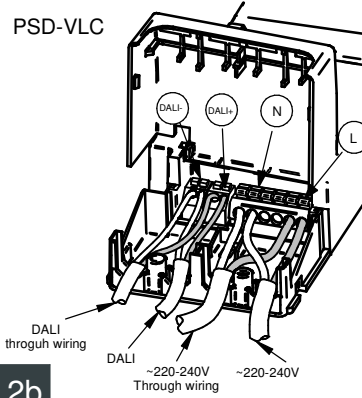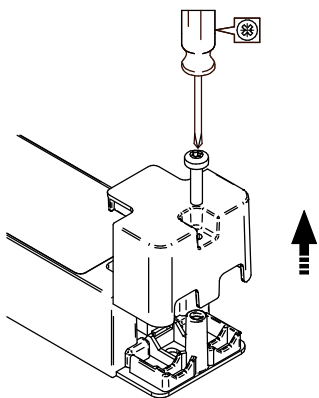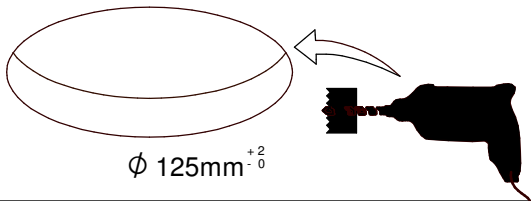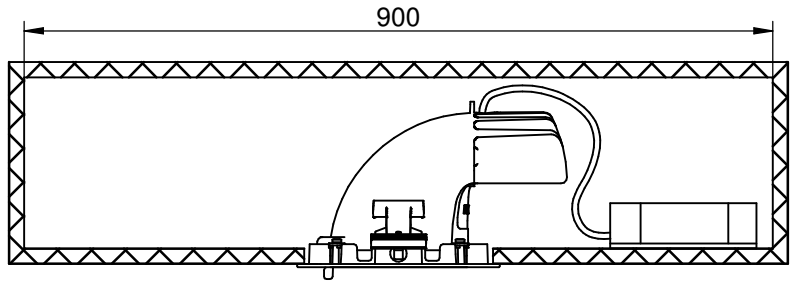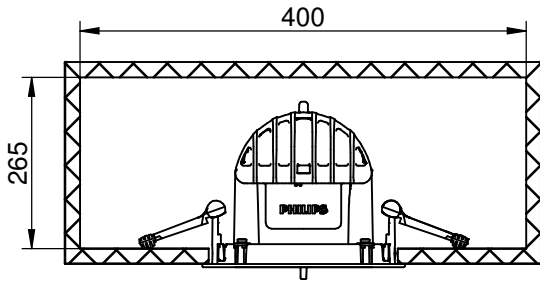




2c

2d





PSU-E 36W

Mains cable

PSU-E 20W

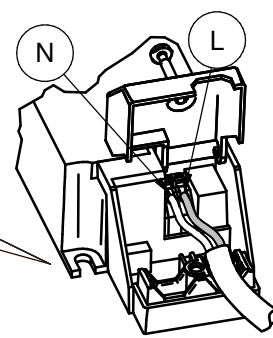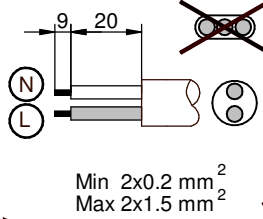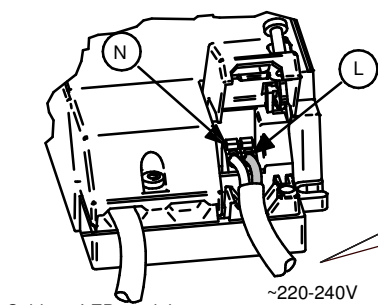


2e

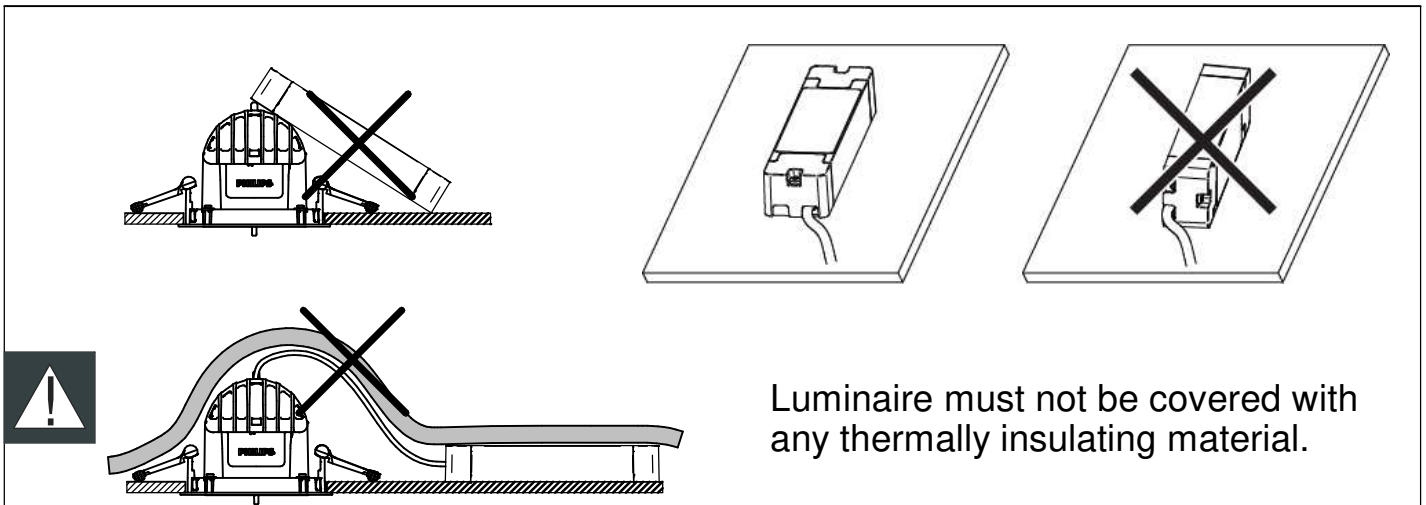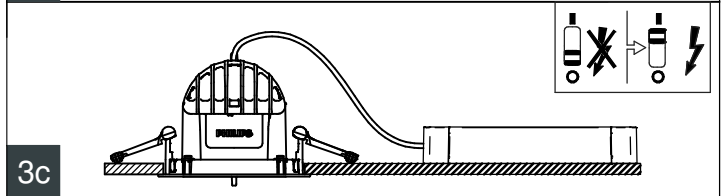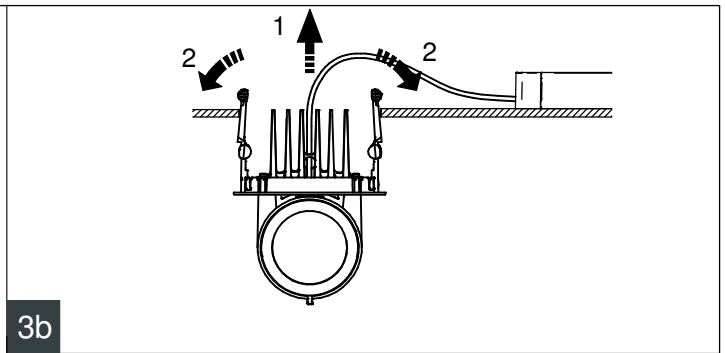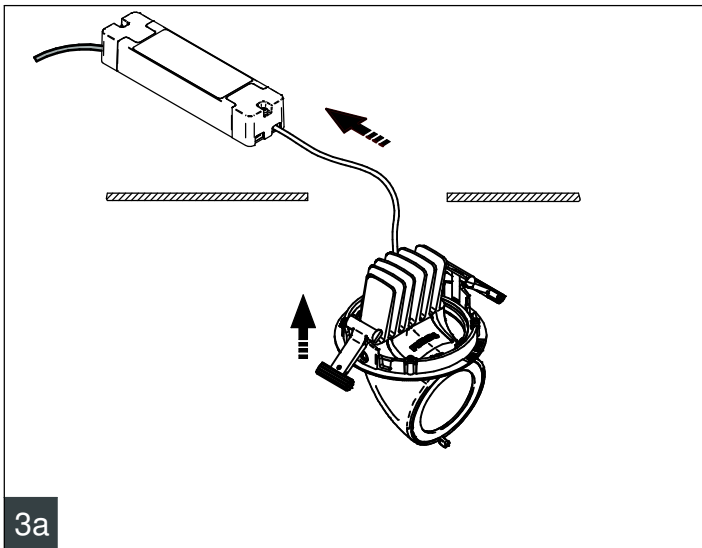

Luminaire must not be covered with any thermally insulating material.


Xtitanium 36W/m 0.3-1.05A 54V 230V (PSU-E)		Xtitanium 36W WH 0.3-1.05A 54V Is (PSE-E)		Xtitanium 36W WH 0.3-1A 54V TD/Is CL (PSD-VLC)		Xtitanium 20W/m 0.15-0.5A 54V 230V (PSU-E)		Xtitanium 20W WH 0.15-0.5A 54V Is (PSE-E)	
Lum. Pack	Inom. (A)	Lum. Pack	Inom. (A)	Lum. Pack	Inom. (A)	Lum. Pack	Inom. (A)	Lum. Pack	Inom. (A)
Imax. (A)	18	Imax. (A)	16	Imax. (A)	20,4	Imax. (A)	18	Imax. (A)	15,8
Tref. (ms)	0,25	Tref. (ms)	0,216	Tref. (ms)	0,195	Tref. (ms)	0,25	Tref. (ms)	0,224
MCB	Max. Products (pcs)*	MCB	Max. Products (pcs)*	MCB	Max. Products (pcs)*	MCB	Max. Products (pcs)*	MCB	Max. Products (pcs)*
B-10A	21	B-10A	22	B-10A	15	B-10A	21	B-10A	22
B-16A	34	B-16A	36	B-16A	24	B-16A	34	B-16A	36
C-10A	35	C-10A	37	C-10A	24	C-10A	35	C-10A	37
C-16A	57	C-16A	61	C-16A	40	C-16A	57	C-16A	61

Xi tanium 20W WH 0.15-0.5A 54V TD/ Is CL (PSD-VLC)			Xtitanium 50W WH 0.7-1.5A 54V TD/Is CL 230V (PSD-VLC)		
Lum. Pack	Inom. (A)		Lum. Pack	Inom. (A)	
Imax. (A)	20,4		Imax. (A)	24,9	
Tref. (ms)	0,195		Tref. (ms)	0,186	
MCB	Max. Products (pcs)*		MCB	Max. Products (pcs)*	
B-10A	15		B-10A	17	
B-16A	24		B-16A	27	
C-10A	24		C-10A	28	
C-16A	40		C-16A	45	


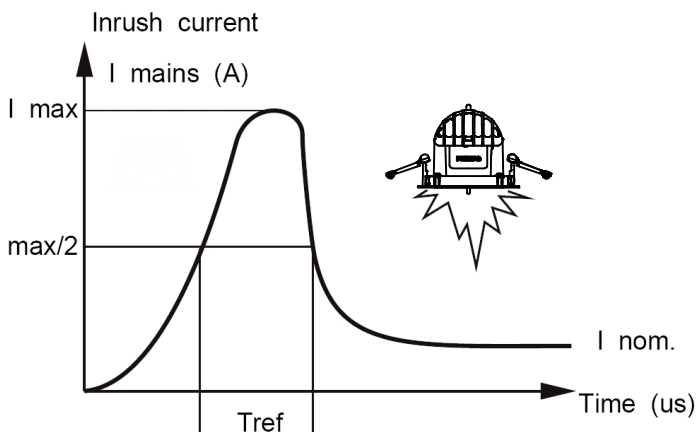


Proper operation of luminaire's tilting

1,

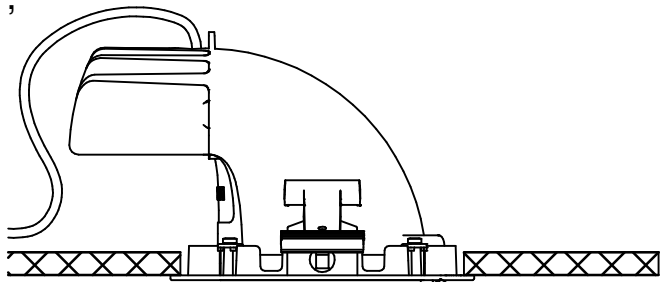

2, Open the housing
by tilting your finger

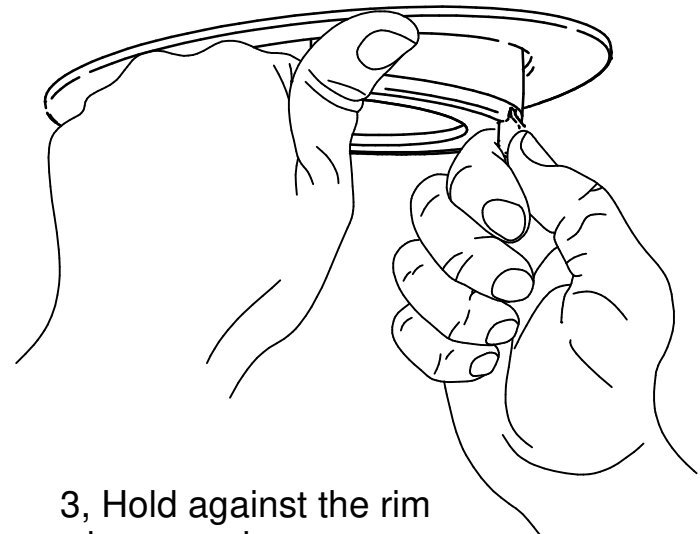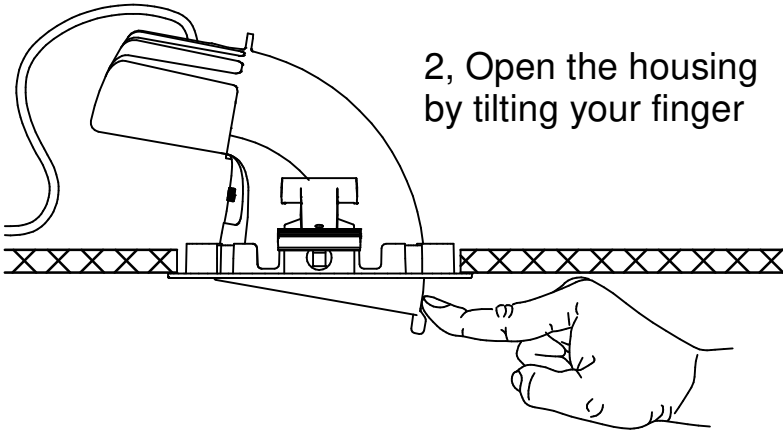

3, Hold against the rim
when opening

© 2018 Signify Holding.

All rights reserved. This document contains information relating to the product portfolio of Signify which information may be subject to change. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.. All other trademarks are owned by Signify Holding or their respective owners.

Signify Holding.
The Netherlands