

COUDE 45 ° P31 FB45 H100 100 à 500
 PERFORATED FLAT BEND 45 ° P31 100x100 to 500 HDG


GC



CABLE
 MANAGEMENT

FT0761-3

11 13

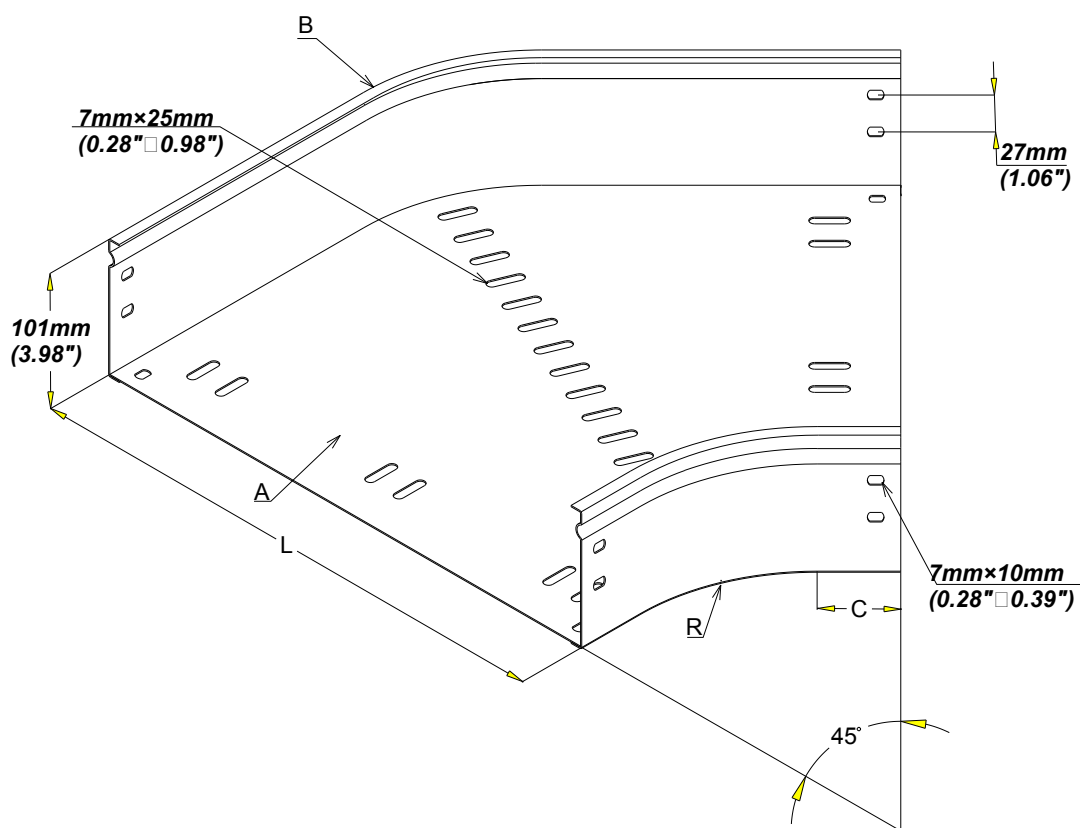

REF	CODE	L /L (mm) (inch)	A /A (mm) (inch)	B /B (mm) (inch)	C /C (mm) (inch)	R /R (mm) (inch)
P31 fbp45 100x100	343 272	100 (3.94")	0.8 (0.032")	0.95 (0.037")	30 (1.18")	100 (3.94")
P31 fbp45 100x150	343 273	150 (5.91")	0.8 (0.032")	0.95 (0.037")	30 (1.18")	100 (3.94")
P31 fbp45 100x200	343 274	200 (7.87")	0.8 (0.032")	0.95 (0.037")	30 (1.18")	100 (3.94")
P31 fbp45 100x300	343 275	300 (11.81")	1 (0.039")	0.95 (0.037")	30 (1.18")	100 (3.94")
P31 fbp45 100x400	343 276	400 (15.75")	1 (0.039")	0.95 (0.037")	50 (1.97")	150 (5.91")
P31 fbp45 100x500	343 277	500 (19.69")	1 (0.039")	0.95 (0.037")	50 (1.97")	150 (5.91")

NORMES/STANDARD

MATIERE / MATERIA
 S 235 JR

EN 10 025

PROTECTION / COATING
 GC/HDG

EN ISO 1461