

COUDE 45 ° P31 FBP45 H100 100 à 500  
 PERFORATED FLAT BEND 45 ° P31 100x100 to 500


GS  
 PG



CABLE  
 MANAGEMENT

FT0761-0

10 03

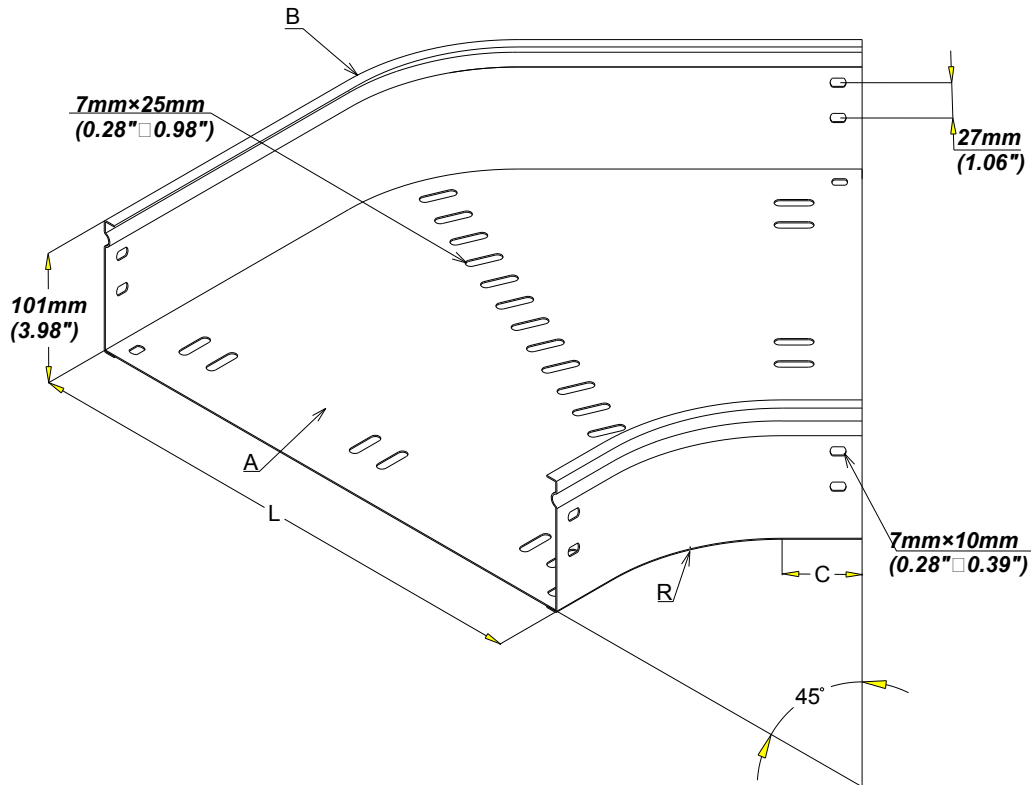

| REF               | CODE    | L /L<br>(mm) (inch) | A /A<br>(mm) (inch) | B /B<br>(mm) (inch) | C /C<br>(mm) (inch) | R /R<br>(mm) (inch) |
|-------------------|---------|---------------------|---------------------|---------------------|---------------------|---------------------|
| P31 FBP45 100x100 | 341 272 | 100 (3.94")         | 0.8 (0.032")        | 0.95 (0.037")       | 30 (1.18")          | 100 (3.94")         |
| P31 FBP45 100x150 | 341 273 | 150 (5.91")         | 0.8 (0.032")        | 0.95 (0.037")       | 30 (1.18")          | 100 (3.94")         |
| P31 FBP45 100x200 | 341 274 | 200 (7.87")         | 0.8 (0.032")        | 0.95 (0.037")       | 30 (1.18")          | 100 (3.94")         |
| P31 FBP45 100x300 | 341 275 | 300 (11.81")        | 1 (0.039")          | 0.95 (0.037")       | 30 (1.18")          | 100 (3.94")         |
| P31 FBP45 100x400 | 341 276 | 400 (15.75")        | 1 (0.039")          | 0.95 (0.037")       | 50 (1.97")          | 150 (5.91")         |
| P31 FBP45 100x500 | 341 277 | 500 (19.69")        | 1 (0.039")          | 0.95 (0.037")       | 50 (1.97")          | 150 (5.91")         |

| Material          | Standard  |
|-------------------|-----------|
| DX 51 D Z 275 MAC | EN 10 346 |