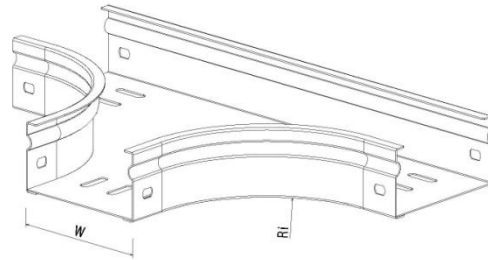
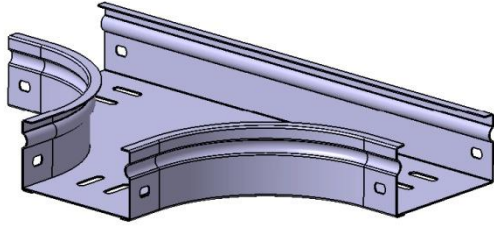


**P31 Flat T H50 HDG**
**Reference(s) : 347 703 to 711**


Ref.	Description	Raw Material (R.M.)	R.M. Standard	Coating Standard	W (mm)	Ri (mm)	Thickness (mm)	Weight (kg)
347 703	Flat T P31 HDG H50 W50	DX51D Z275 (RE MIN 220 MPA)	EN10346	ISO1461	50	20	1	0.3
347 704	Flat T P31 HDG H50 W75	DX51D Z275 (RE MIN 220 MPA)	EN10346	ISO1461	75	100	1	0.7
347 705	Flat T P31 HDG H50 W100	DX51D Z275 (RE MIN 220 MPA)	EN10346	ISO1461	100	100	1	0.8
347 706	Flat T P31 HDG H50 W150	DX51D Z275 (RE MIN 220 MPA)	EN10346	ISO1461	150	100	1	1.1
347 707	Flat T P31 HDG H50 W200	DX51D Z275 (RE MIN 220 MPA)	EN10346	ISO1461	200	100	1	1.4
347 708	Flat T P31 HDG H50 W300	DX51D Z275 (RE MIN 220 MPA)	EN10346	ISO1461	300	100	1	2.1
347 709	Flat T P31 HDG H50 W400	DX51D Z275 (RE MIN 220 MPA)	EN10346	ISO1461	400	150	1	4.5
347 710	Flat T P31 HDG H50 W500	DX51D Z275 (RE MIN 220 MPA)	EN10346	ISO1461	500	150	1	4.7
347 711	Flat T P31 HDG H50 W600	DX51D Z275 (RE MIN 220 MPA)	EN10346	ISO1461	600	150	1	6.0