



## Metal Mémoire Style Illuminated switches


Cat. Nos: AR-67191/92/93 - AR-67291/92/93



AR-67191 - AR-67291



AR-67192 - AR-67292

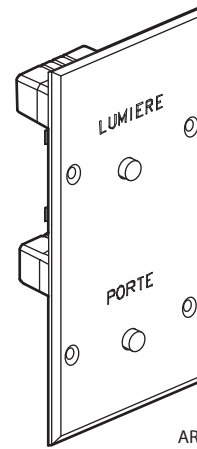

AR-67193 - AR-67293

### 1. USE

2-module flush-mountable local control units with push-buttons.  
 Fitted with Art faceplate and an indicator for the illuminated and monitor functions.  
 Mechanisms supplied with site protection covers.

### 2. RANGE

#### "Porte" (door) illuminated switch

AR-67191	● Brushed steel
AR-67291	● Brushed gold


#### Guichet lumineux "Lumière"

AR-67192	● Brushed steel
AR-67292	● Brushed gold

#### Guichet lumineux "Porte" + "Lumière"

AR-67193	● Brushed steel
AR-67293	● Brushed gold

### 3. DIMENSIONS (mm)

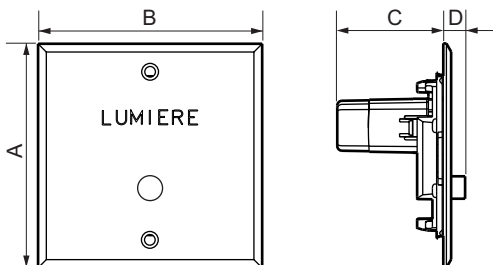

Cat. Nos	A	B	C	D
AR-67191 - AR-67291 - AR-67192 - AR-67292	80	80	38	8
AR-67193 - AR-67293	151	80	38	8

### 4. CONNECTION

Terminal type: screw  
 Capacity: 1.5 mm<sup>2</sup>  
 Compatible flexible or rigid cable  
 Screwdriver: 4 mm flat

### 5. ASSEMBLY

- Do not use an electric screwdriver to tighten the screws when assembling wiring accessories.
- Take care not to overtighten the visible screws when assembling Mémoire style wiring accessories:
  - Risk of damaging the screw heads.
  - Risk of the screwdriver slipping and permanently scratching the plate.
  - Risk of the plate warping (bending), resulting in the plate not lying flat against the wall.
- Use a flat screwdriver (4 mm wide, 0.8 mm thick) for the screws supplied on the wiring accessory.
- ART d'Arrould electrical wiring accessories are supplied with long fixing screws which can be cut at several points to adapt the screw length to the box flush-mounting depth in the wall.

If ART d'Arrould wiring accessories are being mounted in thick surfaces such as tiles, marble, wainscot panelling with flush-mounting boxes chased deep into the wall, the whole screw length can be used to fix the wiring accessory.

If ART d'Arrould wiring accessories are being installed in walls with non-projecting flush-mounting boxes (masonry walls, dry partitions), the screws which can be cut at several points to shorten the thread.

To protect the products, it is essential to install them: once all surface coatings are completely dry, in a dry, non-aggressive environment, indoors only.

It is recommended that you install the plates only after the wall coatings have been completely finished (paint, fabrics, etc.).

## 6. TECHNICAL CHARACTERISTICS

### ■ 6.1 Mechanical characteristics

Impact test: IK 02

Ingress of solids bodies and liquids: IP 20

### ■ 6.2 Material characteristics

• Brushed stainless steel + varnish:

Cat. Nos AR-67191 - AR-67192 - AR-67193

• Decorative brushed brass + varnish:

Cat. Nos AR-67291 - AR-67292 - AR-67293

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place

650°C/30 s for other insulating components

### ■ 6.3 Electrical characteristics

Voltage: 250 V~

Frequency: 50/60 Hz

Indicator: power 1 W - voltage 220 V

### ■ 6.4 Climate characteristics

Storage temperature: - 10°C to + 70°C

Operating temperature: - 5°C to + 35°C

## 7. CARE

Clean and dust using a soft, damp cloth (dampened with water) or wipes impregnated with a product containing less than 5% alcohol and anionic surfactant.

**Caution:** Always test before using other special cleaning products.

### Banned products

- Solvents, various essential oils, paint, or adhesive tape,
- Scouring powders (because are abrasive),
- Products containing bleach,
- Special products for stainless steel,
- Renovators (because they often contain abrasives and chemical agents),
- Splashes or fumes from floor, paint, or wood stripping products, etc.

### Caution:

Any mechanical attack or foreign object (screwdriver, etc.) striking the surface of the plate would damage the finish and therefore also the surface treatment.

## 8. REFERENCE CODES FOR COMPLETE MECHANISMS

Type references	Finish	Characteristics	Terminals	Control
C	Chrome-plated, Gold-plated	2 A - 250 V~	st	PBM

st: screw terminal

PBM: momentary contact push-button

## 9. STANDARDS AND APPROVALS

NF certified

Compliant with installation and manufacturing standards.

See e.catalogue