



Surface mounting single TV sockets


Cat. Nos: 0 860 40 - 0 860 53 - 0 861 40 - 0 861 53




0 860 40



0 860 53



0 861 40



0 861 53


1. USE

Single male \varnothing 9.52 mm and screw-type female F TV connectors
 Recommended cable 17/19 VATC
 DTT and UHD compatible
 Shielded star (Class A)
 0-2400 MHz


2. RANGE

Item	Complete	Modular
Single screw-type female F TV socket	0 860 53	0 861 53
Single male TV socket \varnothing 9.52 mm	0 860 40	0 861 40

3. DIMENSIONS (mm)

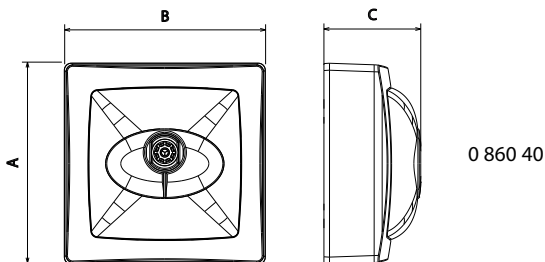


0 860 40

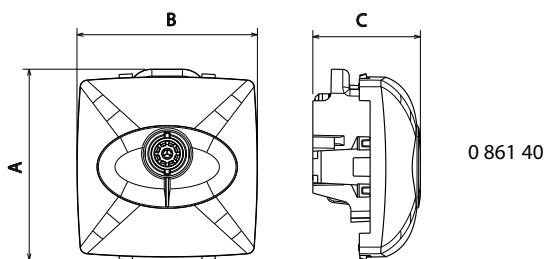



0 861 40

Cat. No.	A	B	C
0 860 40	72	72	35
0 860 53			38
0 861 40	57.7	54.5	32.5
0 861 53			36

4. CONNECTION

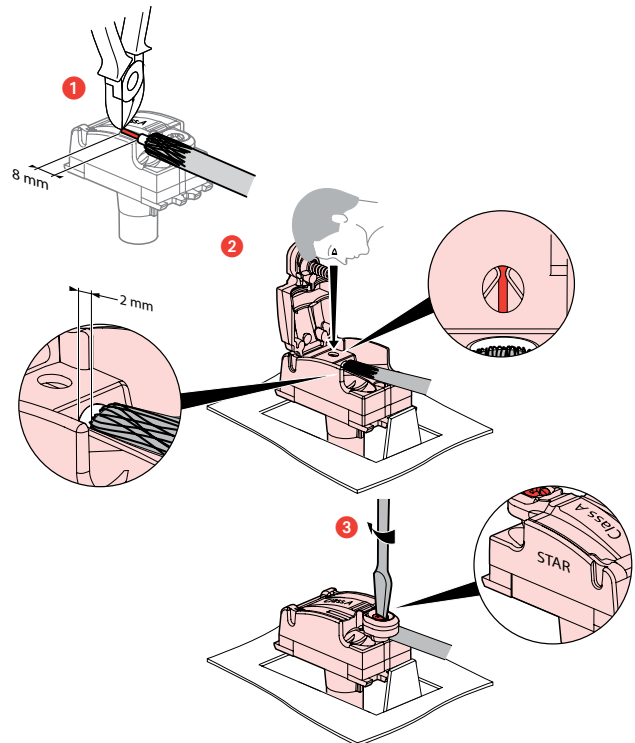

5. WIRING PRECAUTIONS

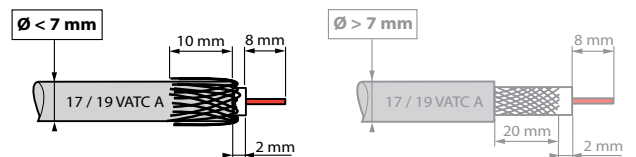

Connection from the rear of the socket reduces deformation of the coaxial cable, thus avoiding the risk of impedance loss and impaired performance.

6. TECHNICAL CHARACTERISTICS

■ **6.1 Mechanical characteristics**

Protection against solid bodies and liquids: IP 21
 Protection against impact: IK 04
 Cable strength 120 N: IEC 61169-24

■ **6.2 Material characteristics**

Casing: Poly gloss appearance

Colour: - White RAL 903
 - Aluminium

Material: - Plate: ABS/PC
 - Cover plate: ABS
 - Zero halogen
 - UV resistant

Motor: - Casing: Zamac

- Cover: Zamac
 - Pin: Bronze
 - Screws: Zinc-plated steel

■ **6.3 Electrical characteristics**

- Characteristic impedance: 75 ohms
 - Male connector Ø 9.52 mm
 - Screw-type female F connector
 - Class A shielding efficiency (class A shielding is necessary to prevent interference from 3G and 4G phone signals, as these undesirable signals can cause pixellation of on-screen images or distort soundtracks)
 - Frequency bands: TV/SAT: 0 - 2400 MHz
 - Attenuation: 1 dB maximum
 - Insulation resistance: IEC 61169-24
 - Compatible with remote feed

■ **6.4 Climate characteristics**

Storage and operating temperature: -5 °C to +35 °C



7. CLEANING

Clean the surface with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.
 Resistant to the following products: hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using special cleaning products.


8. STANDARDS AND APPROVALS

- EN 50083-2
- EN 50083-4
- Class A certificate

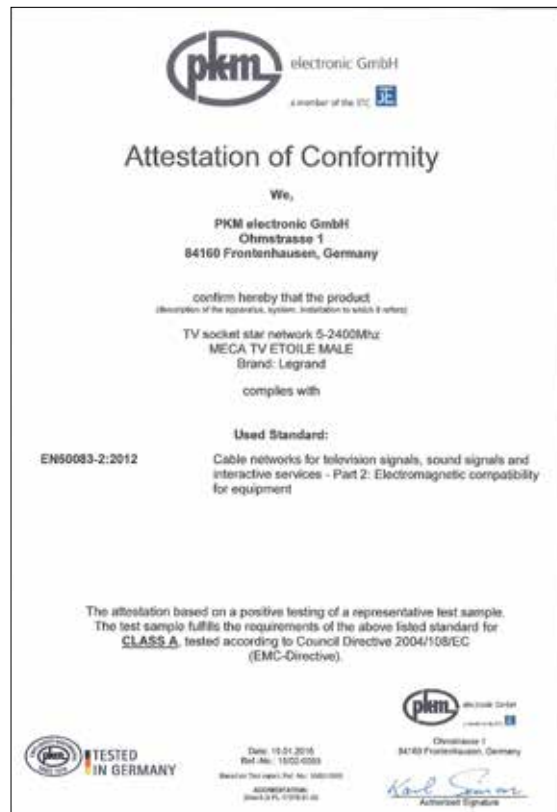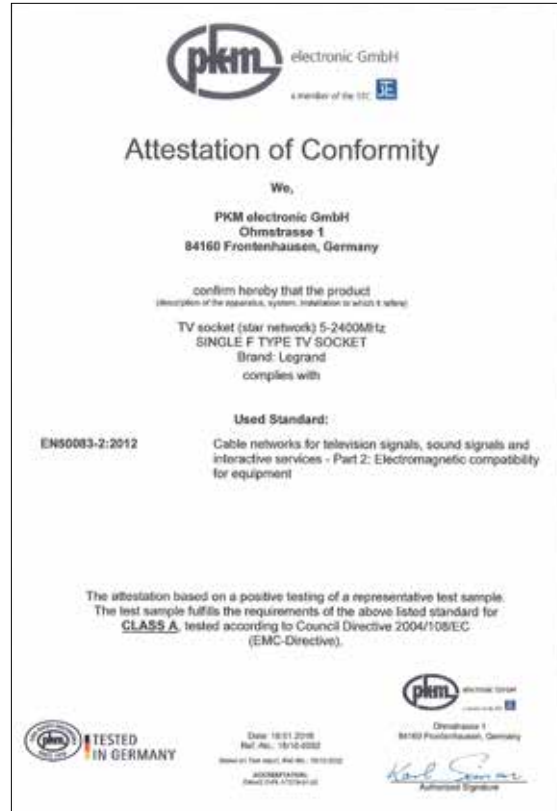

9. PERFORMANCE

Single male TV socket

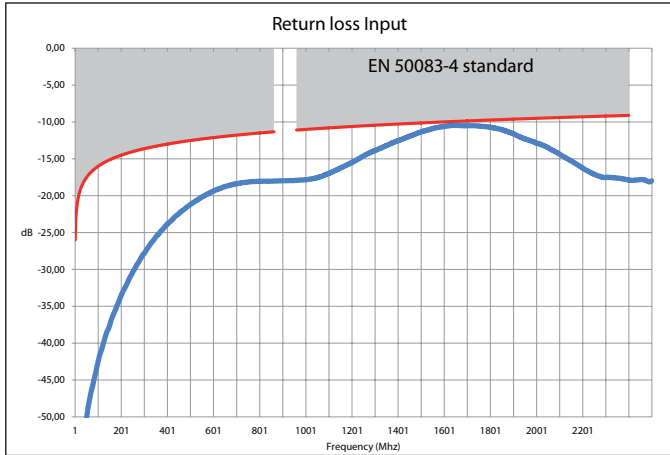

Single screw-type female F TV socket

