

1. USE

These cable guide are used to rapidly attach a cable to a wall without damaging.

2. RANGE

■ 2.1 Pre-drilled version, with self-adhesive, for 1 cable

Equipped with a double base insulating the nail or the staple from the cable.

References	For 1 cable of	Delivered in length of
0 300 96	Ø 3 to 6 mm	40 lengths of 1,20 m
0 300 97	Ø 7 to 9 mm	40 lengths of 1,20 m
0 300 98	Ø 3 to 6 mm	66 lengths of 2,10 m
0 300 99	Ø 7 to 9 mm	45 lengths of 2,10 m

Color : white
 Supplied with cover

■ 2.2 Self-adhesive version, for several cables

References	For cables of	Delivered in length of
6 489 04	Ø 10,5 mm maxi	60 lengths of 2,10 m

Color : white
 Supplied with cover

■ 2.3 Without adhesive version, big capacity cable guide

Equipped with an integrated device for holding cables in place

References	For	Delivered in length of
0 300 25	2 cables of Ø 10 mm maxi	40 lengths of 2,10 m
0 300 78	1 cable of Ø 10 mm maxi/ compartment	40 lengths of 2,10 m
0 300 81	1 cable of Ø 14 mm maxi/ compartment	24 lengths of 2,10 m

Color : RAL 8014 brown
 Supplied with cover


3. DIMENSIONS

■ 3.1 Cable Guide Overall dimensions

References	Sections
0 300 96/98	
0 300 97/99	
6 489 04	
0 300 25	
0 300 78/81	

3. DIMENSIONS (cont.)

■ 3.2 Pre-drilled holes dimensions for 0 300 96/97/98/99

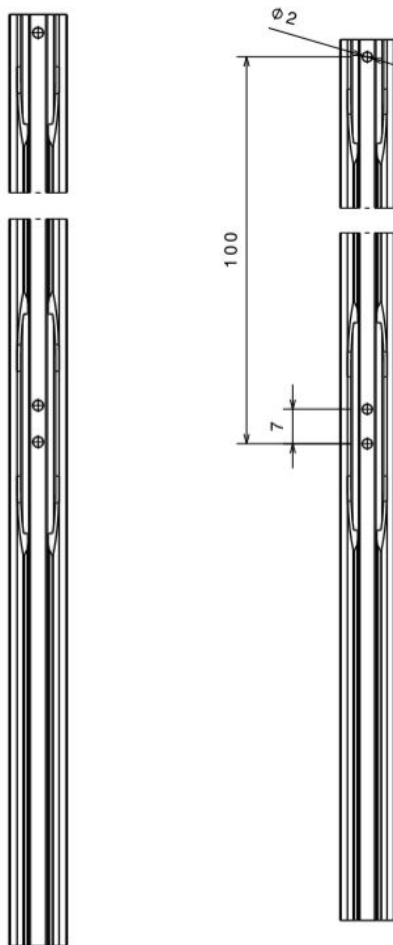

■ 3.3 Adhesive tape dimensions for 0 300 96/97/98/99 & 6 489 04



Double sided adhesive tape dimensions	Width	Tape thickness
0 300 96/98	9 mm	1 mm
0 300 97/99	13 mm	1 mm
6 489 04	12 mm	0.2 mm

4. INSTALLATION

■ 4.1 Cable guide fixation

0 300 96/97/98/99

- Nail or staple mounting : the base is pre-drilled every 10 cm

0 300 96/97/98/99 & 6 489 04

- Adhesive foam mounting : foam base equipped with a self-adhesive film (1 mm thick for 0 300 98/99 & 0,2 mm for 6 489 04)

0 300 25 - 0 300 78 & 0 300 81

- by:
 - joining (cartridge of adhesive neoprene for glue gun ref. 30949)
 - wall plugs for immediate fixing (without screw nor nail ref. 0 308 98/99)
 - screw, nails...

■ 4.2 Application of adhesive tape

Surface must be clean and free from dust and grease.
 Avoid touching the tape exposed adhesive surface in order to keep full adhesive performance.
 Pressure sensitive adhesive must be applied with a maximum of pressure in order to achieve maximum pressure level.
 The indicated level of performance will be reached after a bonding period of 24 Hrs. at 23°C.

5. GENERAL CHARACTERISTICS

■ 5.1 Material Characteristics

5.1.1 Cable guide material

0 300 96/97/98/99 & 6 489 04

- PVC white : conform to RoHS directive (Lead-Free product)

0 30025/78/81

- PVC brown : conform to RoHS directive (Lead-Free product)

5.1.2 Material of double sided adhesive tape

- Carrier : white PE foam (except for 6 489 04)
- Adhesive : modified solvent acrylate
- Liner : siliconized PP-liner, red (Pantone 186C)

■ 5.2 Mechanical Characteristics

Resistance to impact : 1 J