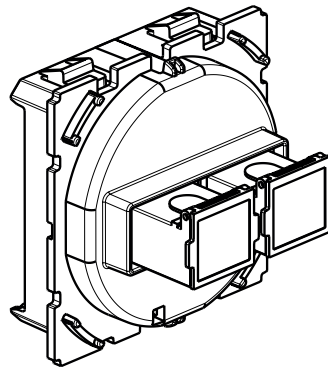
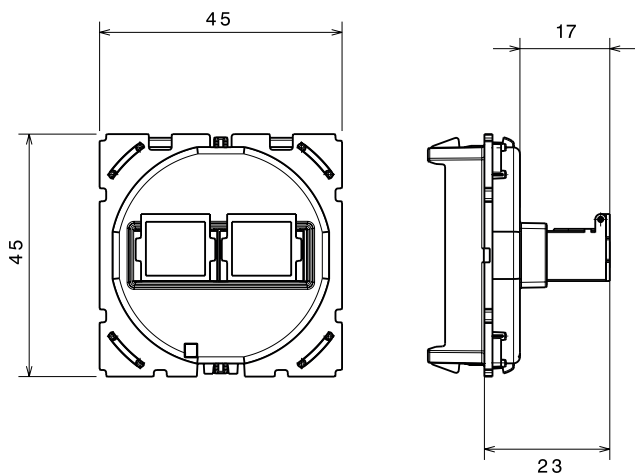


Celiane™**Fibre optic feedthrough sockets**

Réf.(s) : 0 673 95

**1. USE**

Fibre optic 2 Singlemode, SC/APC simplex adapter with shutter.
They are used to connect 2 fibres (fitted with their connectors). They are supplied with protective caps.
Number of modules : 2
Minimum installation depth : 50 mm

2. OVERALL DIMENSIONS**3. TECHNICAL FEATURES****3.1 Features of the connectors**

- SC/APC connector
- Rectangular shape
 - Singlemode APC
 - Insertion loss: 0.2 dB
 - Endurance (500 insertions): increase of 0.2 dB maximum

3.2 Climatic features

- Usage and storage temperature: - 40°C to + 85°C