


# PHILIPS

## CoreLine High-bay G3

### BY120P/BY121P

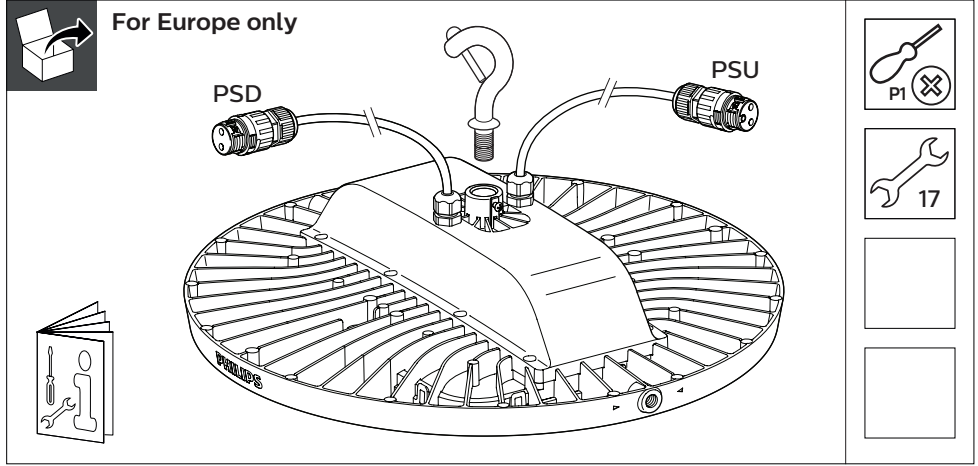

220V  
240V

50Hz  
60Hz



IP65

IK07

GLOW WIRE  
650 °C

Ta Min.  
-30°C

Ta Max.  
40°C

	System lumen (lm)	CCT	P (W)	Optics	D	H	W	kg
BY120P G3 LED105S/840 PSU WB GR	10500	4000	85	WB	379	96	382	3.3
BY121P G3 LED205S/840 PSU WB GR	20500		155		452	107	454	4.8
BY120P G3 LED105S/840 PSD WB GR	10500		85		379	96	382	3.3
BY121P G3 LED205S/840 PSD WB GR	20500		155		452	107	454	4.8

