


1. USE

Cables with 4 twisted pairs, 100 ohms for high-speed data networks. 802.3 bt PoE++ up to type 4 applications compatible according to installation standards ISO/IEC 14763-2 : 2019 and EN 50174-2 : 2018

2. DESCRIPTION

8 x 22 AWG conductors with PE insulation Pe
 4 pairs with individual aluminium/polyester tape screens

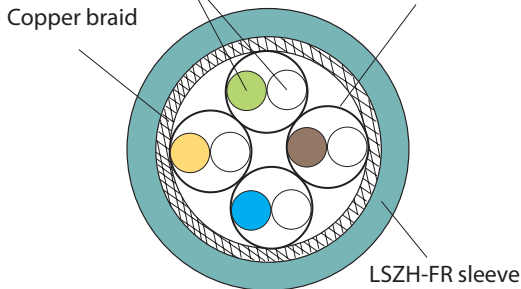

3. MARKING AND PACKAGING

Marking of Legrand cables

- LEGRAND
- Catalogue number
- Number of pairs
- Gauge
- Type
- Impedance
- Type of sleeve
- Category
- Conformity to standards
- EUROCLASS
- Velocity of propagation
- Traceability
- Measurement (length in meters).

Complementary marking (on label)

- Designation
- Made in....

4. PERFORMANCE AT 2000 MHZ (STAND. ANSI/TIA 568.2-D)

Maximum attenuation (dB/100 m):	90,5
Minimum NEXT (dB):	55,9
PS NEXT (dB) :	52,9
ACRF (dB / 100 m) :	34,6
PS ACRF (dB / 100 m) :	31,6
Return Loss (dB) :	13,1

5. TECHNICAL AND MECHANICAL FEATURES

Catalogue number	0 337 88
Type	S/FTP
Type of sleeve	LSZH-FR
Number of pairs	4
Assembly	Pairs
Diameter over insulation (mm)	1,6±0.07
Average nominal diameter of the cable (mm)	8,5
Weight of cable (kg/km)	80
Min. bending radius when laying (mm)	>68
AWG gauge*	22

* According to UL 444 ed.3 table 4

6. ELECTRICAL FEATURES AT 20°C

Catalogue number	0 337 88
Type	S/FTP
Maximum linear resistance (ohm/km)	70 *
DC dielectric strength	1 KV / 1 min *
Minimum insulation resistance (Mohm.km)	5000
Minimum propagation speed	73 %
Characteristic impedance at 100 MHz	100 ±5Ω

* According to standard IEC 61156-9

7. ORDERING INFORMATION

Catalogue number	0 337 88
Type	S/FTP
Colour	Aqua RAL 6027
Pack (m)	500
Packaging	Reel

8. ENVIRONMENTAL FEATURES

Transport and storage temperature: -20 at + 60 °C
Storage temperature before installation: 10°C during 24h (if stock ≤ 5°C)
Usage temperature: - 20 to + 60 °C

Fire rating: EN 50399, IEC 60332-3-24, EN 60332-3-24
Smoke density : IEC 61034-2, EN 61034-2
Toxicity of fire effluent : IEC 60754-2, EN 60754-2

EUROCLASS EN 13501-6 = Class Dca s2d2a1
Also compliant with Eca

9. STANDARDS AND APPROVALS

Cat 8, 2000 MHz
Electrical performances and characteristics :
- ANSI/TIA 568.2-D
- EN 50173-1
- EN 50288-9-1
- ISO/IEC 11801
- IEC 61156-9
IEEE 802.3bt : PoE++